



Product Specification

SuperPod WiFi 6E

Product code: 945-1107

Access

2.5GE

Features

App

Cybersecurity

Parental-Control

Motion detector

Adaptive WiFi

WiFi 6E

2.4G 2x2

5G 4x4

6G 4x4

OpenSync™ included

HomePass®

WorkPass®



WiFi-Interfaces



Tri-band, tri-concurrent radio operation

- 6 GHz: 4x4 MIMO 802.11ax, 20/40/80/160 MHz
- 5 GHz: 4x4 MIMO 802.11ax, 20/40/80/160 MHz
- 2.4 GHz: 2x2 MIMO 802.11ax, 20/40 MHz

Ethernet Interfaces



- 1 port 2.5 GE for WAN or LAN
- 1 port 1 GE for LAN

IoT-Radio



- Bluetooth Low Energy 1 port 1 GE for LAN

Power



- Power Supply: 110 to 240VAC, 50/60Hz
- Plug Type: Swiss Plug
- Power Consumption: 11W Standby, 16W Average, 26W Maximum

Environment



- Operating Temperature: 0°C to 40°C
- Operating Relative Humidity: 10% to 90%
- Storage Conditions: -20°C to 70° C 10% to 90% (Relative Humidity)

Networking and Connectivity



- Networking Modes: Auto-sensing Router or Bridge mode
- Firewall and Networking: NAT, DHCP server, UPnP, client IP reservation, port forwarding
- Home SSIDs: Managed with HomePass® or WorkPass®
- Guest Access: Managed with HomePass® or WorkPass®
- Authentication/Encryption: WPA2-PSK (AES) / WPA3 (SAE)






Packaging and Content

- Bulk packaging with several SuperPods 6E in one carton
- Optional: high-end single packaging (including ethernet cable)




Size and Weight

- Size: 106mm W x 97mm H x 40mm D (not including plug)
- Weight: 290g

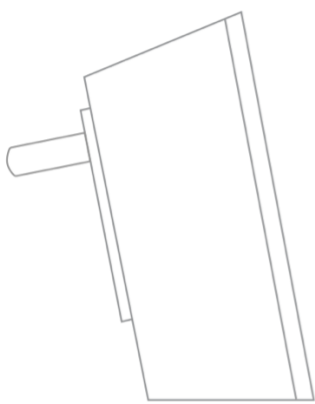

40mm

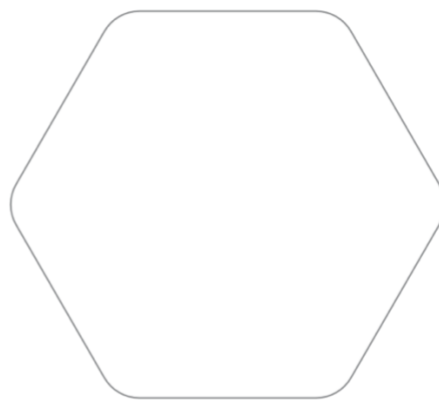

106mm

97mm



Interface

